

56W / 3640lm / 2700K / DALI / Flood 50° /  
1201mm


73031

Design: O/M + Bartenbach GmbH  
Module with double focus lens and housing and perforated cover plate made of aluminium with textured-paint finish.  
Available in white (.01) and black (.02)

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 48Vdc




LED	2700K	Light Source	Luminaire
Power	56W	56W	65,9W
Flux	4800lm	4800lm	3640lm
Efficiency	86lm/W	86lm/W	55lm/W
LOR	-	-	76%
UGR	-	-	<16




Beam angle  
Flood 50°

Application



Weight

-

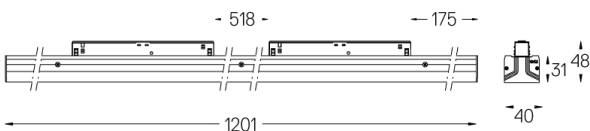

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

**70045** Modules removal tool  
20x75mm

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class F  
Model Identifier 4053560342H