

14W / 940lm / 3000K / DALI / Medium 30° /  
601mm

73052



Design: O/M + Bartenbach GmbH

Module with double focus lens and housing and perforated cover plate made of aluminium with textured-paint finish.

Available in white (.01) and black (.02)


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 48Vdc




LED	3000K	Light Source	Luminaire
Power	14W	14W	17,1W
Flux	1290lm	1290lm	940lm
Efficiency	92lm/W	92lm/W	55lm/W
LOR	-	-	73%
UGR	-	-	<10




Beam angle  
Medium 30°

Application



Weight

-

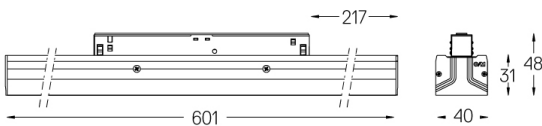

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

**70045** Modules removal tool  
20x75mm

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains a light source of efficiency class E Model Identifier 4053560343L