

14W / 1300lm / 4000K / DALI / Flood 50° /
601mm


73086

Design: O/M + Bartenbach GmbH
Module with double focus lens and housing and perforated cover plate made of aluminium with textured-paint finish.
Available in white (.01) and black (.02)

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 48Vdc




LED	4000K	Light Source	Luminaire
Power	14W	17,1W	
Flux	1720lm	1300lm	
Efficiency	123lm/W	76lm/W	
LOR	-	76%	
UGR	-	<13	




Beam angle
Flood 50°

Application



Weight

-

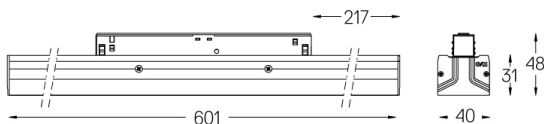

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Optional

70045 Modules removal tool
20x75mm

Data according to regulations

2019/2020/EU supplemented by 2021/341 | 2019/2015/EU supplemented by 2021/340/EU Energy Consumption Labelling Ordinance. This product contains light sources of efficiency class D
Model Identifier 4053560345L