

Design: O/M + Bartenbach GmbH

LED CRI>90 / >50.000h, L80/B10
2-step MacAdam / power supply included.
IP20 | 230Vac | 50/60Hz




LED	2700K	Fuente de luz	LLuminaria
Potencia	21W		24W
Flujo	1800lm		1380lm
Eficiencia	86lm/W		58lm/W
LOR	-		0.766666666666667
UGR	-		<10



Ángulo de haz
Flood 50°

Aplicación

Peso
0,6Kg

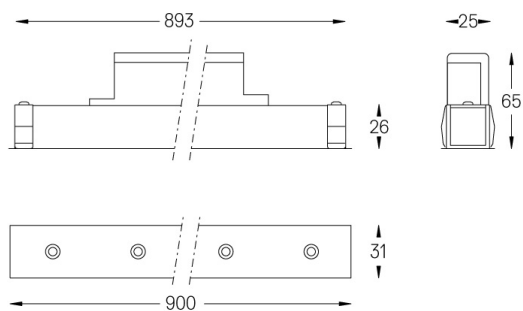

Acabados

- .01 Blanco/RAL 9010
- .02 Negro/RAL 9005