

Design: O/M + Bartenbach GmbH

LED CRI>90 / >50.000h, L80/B10  
2-step MacAdam / power supply included.  
IP20 | 230Vac | 50/60Hz




LED	2700K	Source lumineuse	Luminaire
Puissance	52W		64W
Flux	4800lm		3640lm
Efficacité	92lm/W		57lm/W
LOR	-		0.7583333333333333
UGR	-		<16



Angle du faisceau  
Flood 50°

Application

Poids  
0,8Kg

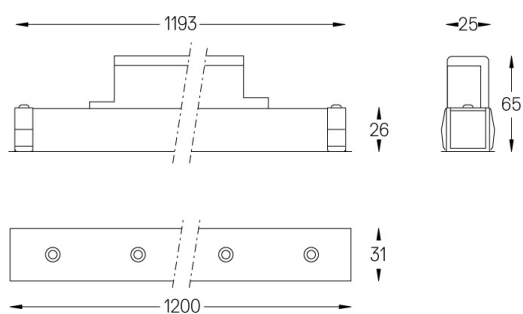

### Finitions

- .01 Blanc / RAL 9010
- .02 Noir / RAL 9005