

Design: O/M + Bartenbach GmbH

LED >80CRI<90 / >50.000h, L80/B10 / 3-step MacAdam  
Power supply included.  
DALI DT8.  
IP20 | 230Vac | 50/60Hz




LED	2200K-5000K	Source lumineuse	Luminaire
Puissance	46W		58W
Flux	3760lm		2720lm
Efficacité	82lm/W		47lm/W
LOR	-		0.72
UGR	-		<10



Angle du faisceau  
Medium 30°

Application

Poids

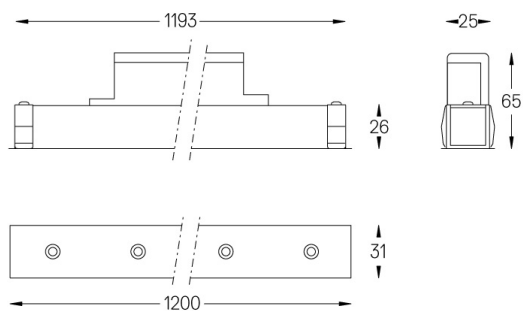

### Finitions

- .01 Blanc / RAL 9010
- .02 Noir / RAL 9005