



Design: O/M + Bartenbach GmbH

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Power supply included.
IP20 | 230Vac | 50/60Hz



| | | |
|---|------------------|--------------------|
|  3000K | Source lumineuse | Luminaire |
| Puissance | 20W | 24W |
| Flux | 2520lm | 2040lm |
| Efficacité | 127lm/W | 87lm/W |
| LOR | - | 0.8100000000000001 |
| UGR | - | <13 |

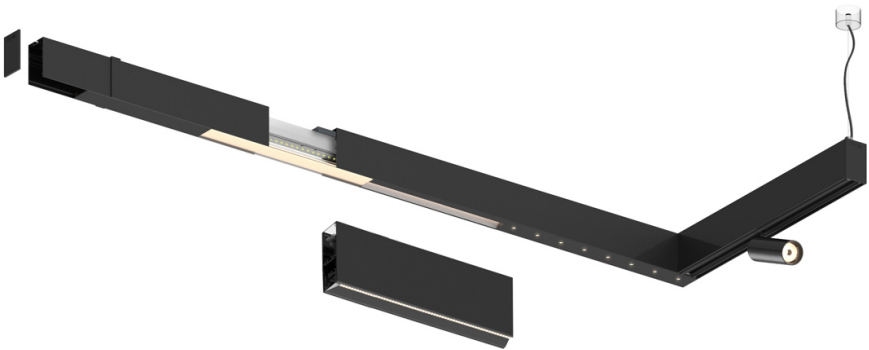


Angle du faisceau
Flood 65°


Application

Poids



Finitions

 .01 Blanc / RAL 9010

 .02 Noir / RAL 9005

