

Design: O/M + Bartenbach GmbH

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz




| LED        | 4000K | Source lumineuse | Luminaire |
|------------|-------|------------------|-----------|
| Puissance  |       | 43W              | 50W       |
| Flux       |       | 6000lm           | 4800lm    |
| Efficacité |       | 142lm/W          | 97lm/W    |
| LOR        |       | -                | 0.8       |
| UGR        |       | -                | <19       |



Angle du faisceau  
Wide flood 80°

Application

Poids

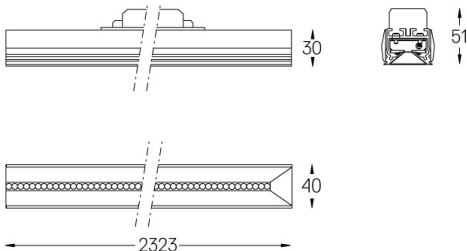

### Finitions

- .01 Blanc / RAL 9010
- .02 Noir / RAL 9005