

20W / 2040lm / 3000K / DALI / Wide flood  
80° / 1728mm


61213

Design: O/M + Bartenbach GmbH

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz




LED	3000K	Source lumineuse	Luminaire
Puissance	20W		24W
Flux	2520lm		2040lm
Efficacité	127lm/W		87lm/W
LOR	-		0.8100000000000001
UGR	-		<19

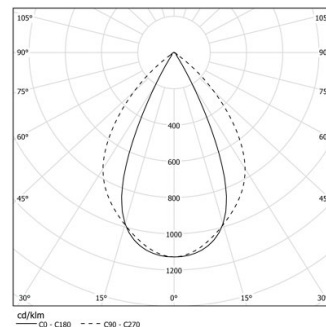

Angle du faisceau  
Wide flood 80°

Application

Poids

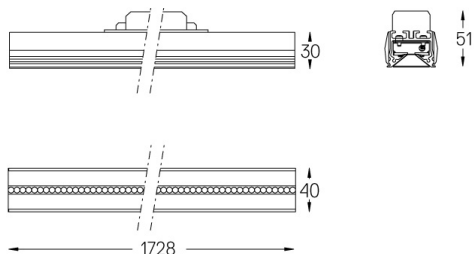

### Finitions

- .01 Blanc / RAL 9010
- .02 Noir / RAL 9005