


Design: O/M + Bartenbach GmbH


LED CRI&gt;90 / &gt;50.000h, L80/B10 / 2-step MacAdam

Power supply included.

IP20 | 230Vac | 50/60Hz

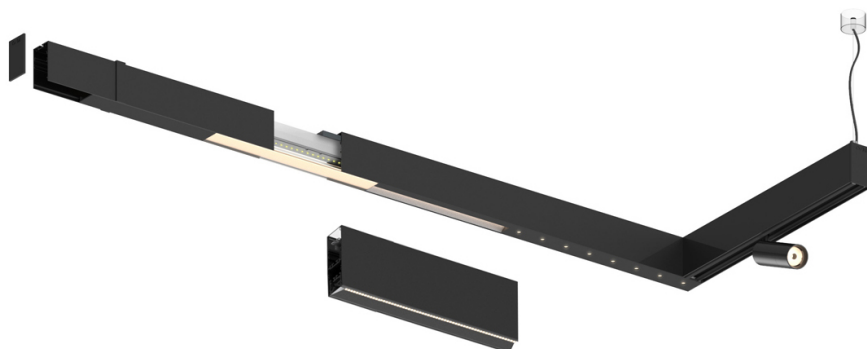

| LED        | 4000K | Source lumineuse | Luminaire |
|------------|-------|------------------|-----------|
| Puissance  |       | 37W              | 44W       |
| Flux       |       | 5200lm           | 4160lm    |
| Efficacité |       | 141lm/W          | 96lm/W    |
| LOR        |       | -                | 0.8       |
| UGR        |       | -                | <16       |

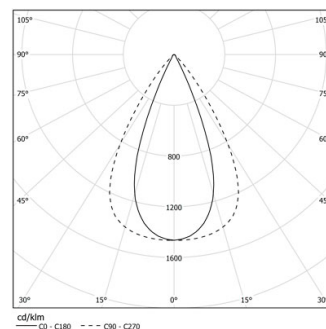Angle du faisceau  
Flood 65°

Application

Poids



## Finitions

- .01 Blanc / RAL 9010
- .02 Noir / RAL 9005

