


21W / 1890lm / 4000K / On/Off / Medium 31°
/ 900mm

64012

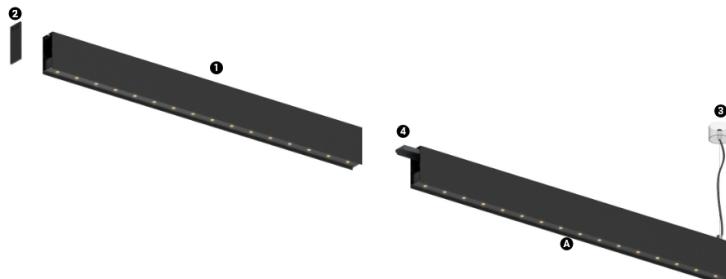

Structure
1 Profile
2 End caps
3 Fitting accessories
4 Profile coupling

Modules
A inVision Module

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam
Source d'alimentation incluse.
IP20 | 230Vac | 50/60Hz




4000K

Source lumineuse

Luminaire

Puissance	21W	25,6W
Flux	2580lm	1890lm
Efficacité	123lm/W	74lm/W
LOR	-	73%
UGR	-	<10



**Angle du faisceau
Medium 31°**

Application



**Poids
0,6Kg**

mm

Finitions

- .01 Blanc / RAL 9010
- .02 Noir / RAL 9005

Choisissez la longueur et la disposition du système exactement comme vous le souhaitez, afin de modéliser les fonctions d'éclairage appropriées pour différentes tâches. Pour plus d'informations, contacter: support@om-light.com

