

Compatibility with other modules must be confirmed
with support@om-light.com

Design: OM + Bartenbach
GmbH
Module with linear extruded lenses (Lightstream)
combined with a secondary reflector, integrated into
an extruded aluminium profile.

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam
Fonte de alimentação incluída.
IP20 | 230Vac | 50/60Hz




LED	2200K-5000K	Fonte de Luz	Luminária
Potência		34W*	40W*
Fluxo		4380lm*	3480lm*
Eficiência		120lm/W	85lm/W
LOR		-	0.8273381294964028
UGR		-	<19



Ângulo de abertura
Wide flood 80°

Aplicação

Peso

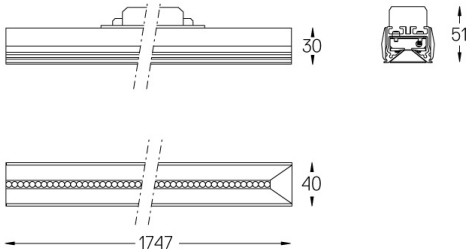

Acabamentos

○ .01 Branco / RAL 9010

● .02 Preto / RAL 9005

Para fornecimento específico de drivers "DALI 2" por favor contactar:
support@om-light.com

Choose the length and layout of the system exactly as you want it, to
model the right lighting functions for different tasks. For further
information please contact: support@om-light.com