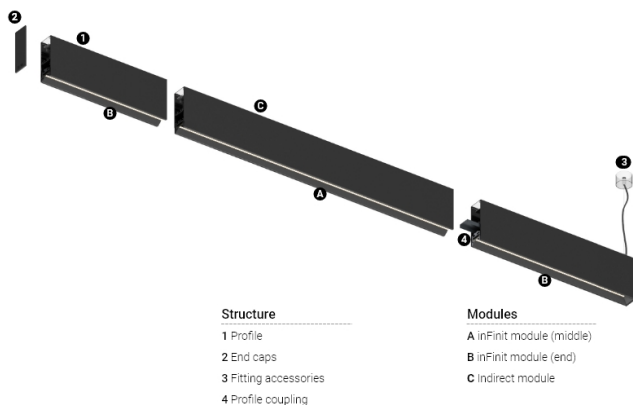


23W\* / 2320lm\* / 2200K-5000K / DALI /  
Wide flood 76° / 1152mm


61238

Design: OM + Bartenbach  
GmbH

Module with linear extruded lenses (Lightstream)  
combined with a secondary reflector, integrated into  
an extruded aluminium profile.  
2200-5000K Tunable White.

LED CRI>80 / >50.000h, L80/B10 / 2-step MacAdam  
Fonte de alimentação incluída.  
IP20 | 230Vac | 50/60Hz




|  LED | 2200K-5000K | Fonte de Luz | Luminária |
|---|-------------|--------------|-----------|
| Potência  |             | 23W*         | 27,3W*    |
| Fluxo   |             | 3000lm*      | 2320lm*   |
| Eficiência  |             | 134lm/W      | 85lm/W    |
| LOR   |             | -            | 77%       |
| UGR   |             | -            | <16       |

Ângulo de abertura  
Wide flood 76°

Aplicação



Peso

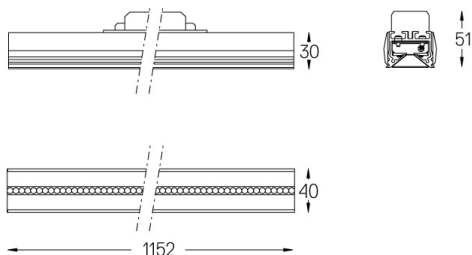

Acabamentos

- .01 Branco / RAL 9010
- .02 Preto / RAL 9005

Para fornecimento específico de drivers "DALI 2" por favor contactar:  
support@om-light.com

Escolha o comprimento e a configuração do sistema exactamente  
como pretende, para modelar as funções de iluminação certas para  
diferentes tarefas. Para mais informações, contacte: support@om-  
light.com