

33W / 3600lm / 4000K / DALI / Flood 65° /  
2899mm

63160

Compatibility with other modules must be confirmed  
with [support@om-light.com](mailto:support@om-light.com)

Design: OM + Bartenbach  
GmbH  
Module with linear extruded lenses (Lightstream)  
combined with a secondary reflector, integrated into  
an extruded aluminium profile.


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Fonte de alimentação incluída.  
IP20 | 230Vac | 50/60Hz



LED	4000K	Fonte de Luz	Luminária
Potência		33W	39W
Fluxo		4500lm	3600lm
Eficiência		136lm/W	92lm/W
LOR		-	0.8
UGR		-	<13



Ângulo de abertura  
Flood 65°  
  
Aplicação  
  
Peso

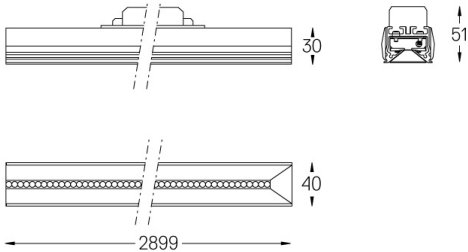

Acabamentos  
○ .01 Branco / RAL 9010  
● .02 Preto / RAL 9005

Para fornecimento específico de drivers "DALI 2" por favor contactar:  
[support@om-light.com](mailto:support@om-light.com)

Choose the length and layout of the system exactly as you want it, to  
model the right lighting functions for different tasks. For further  
information please contact: [support@om-light.com](mailto:support@om-light.com)