

53W / 6000lm / 4000K / DALI / Wide flood  
76° / 2880mm

63179



#### Structure

- 1 Profile
- 2 End caps
- 3 Fitting accessories
- 4 Profile coupling

#### Modules

- A inFinit module (middle)
- B inFinit module (end)
- C Indirect module

Design: OM + Bartenbach

GmbH

Module with linear extruded lenses (Lightstream) combined with a secondary reflector, integrated into an extruded aluminium profile.


LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam

Fonte de alimentação incluída.

IP20 | 230Vac | 50/60Hz




LED	4000K	Fonte de Luz	Luminária
Potência	53W	62,4W	
Fluxo	7500lm	6000lm	
Eficiência	142lm/W	96lm/W	
LOR	-	80%	
UGR	-	<16	

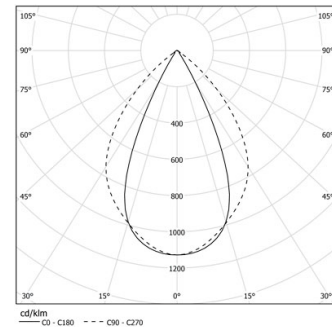


Ângulo de abertura  
Wide flood 76°

Aplicação



Peso

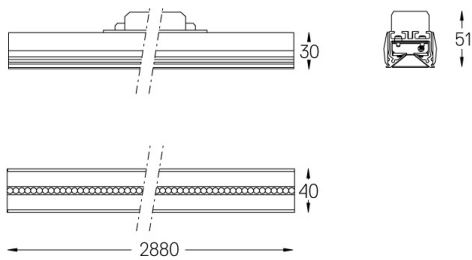

Acabamentos

- .01 Branco / RAL 9010
- .02 Preto / RAL 9005

Para fornecimento específico de drivers "DALI 2" por favor contactar: support@om-light.com

Escolha o comprimento e a configuração do sistema exactamente como pretende, para modelar as funções de iluminação certas para diferentes tarefas. Para mais informações, contacte: support@om-light.com