

## inVision45 Surface/Pendant

26W / 1740lm / 2700K / DALI / Medium 31° / 611mm

63929



Design: O/M + Bartenbach GmbH

Surface or pendant luminaire with housing made of aluminium with electrostatic 100% polyester paint with textured finish.


Aluminium anodised end caps with electrostatic 100% polyester paint with textured-finish.

Housing and perforated cover plate made of aluminium with textured-paint finish. With the latest Bartenbach GmbH technology, inVision45 is a discreet solution, that can use great light distribution and visual comfort from a nearly invisible source. Fitting accessories for pendant version ordered separately.

LED CRI>90 / >50.000h, L80/B10 / 2-step MacAdam  
Power supply included.  
IP20 | 230Vac | 50/60Hz



| LED        | 2700K  | Light Source | Luminaire |
|------------|--------|--------------|-----------|
| Power      | 26W    |              | 31,7W     |
| Flux       | 2400lm |              | 1740lm    |
| Efficiency | 92lm/W |              | 55lm/W    |
| LOR        | -      |              | 73%       |
| UGR        | -      |              | <10       |




Beam angle  
Medium 31°

Application



Weight  
1,3Kg

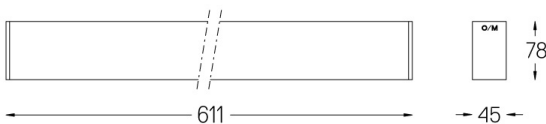

Finishes

- .01 White / RAL 9010
- .02 Black / RAL 9005

Mandatory

54036 Pendant direct fitting accessory

56051 Clear Base DALI

ø60x35mm

For the specific supply of "DALI 2" drivers, please contact:  
support@om-light.com